

# sunshower®

health & wellbeing

## COMBI

WALL MOUNTED | FULL BODY | UV | INFRARED

ARTICLE NO. 80052 / 80062

### TECHNICAL SPECIFICATIONS

SESSION TIME INFRARED	8 MINUTES + 4 MINUTES COOLING
SESSION TIME UV	10 MINUTES + 4 MINUTES COOLING
DIMENSIONS (H*W*D)	1450 * 300 * 200 MM
NET WEIGHT	20 KG
IP CODE	IPX5
VOLT/FREQUENCY	230 V- / 50HZ
POWER	1995 W
INSULATION CLASS	II
POWER UV LAMPS	400 W
LAMP TYPE	3X UV PHILIPS HPA CLEO SWIFT 250-500 4X IR USHIO 500 W
UV CLASS	TYPE 3
TEMPERATURE RANGE	10°C - 40°C
HUMIDITY RANGE	20% - 100%



### INSTALLATION

- Mounts on two brackets in a 90° corner of your shower cabin
  - One bracket at the bottom, installed on both walls
  - One bracket at the top, installed on one wall
- Suitable for installation in the shower cabin
- Not suitable for installation in a steam cabin

### ELECTRICS



- Can be added to an existing fuse group
- YMKV cable 2x2,5mm<sup>2</sup> from right wall
- Connect to 30mA ground fault circuit interrupter
- Electric wiring in waterproof junction box (delivered with unit) on the backside of the Sunshower

### VENTILATION

- Integrated ventilation system

# sunshower®

health & wellbeing

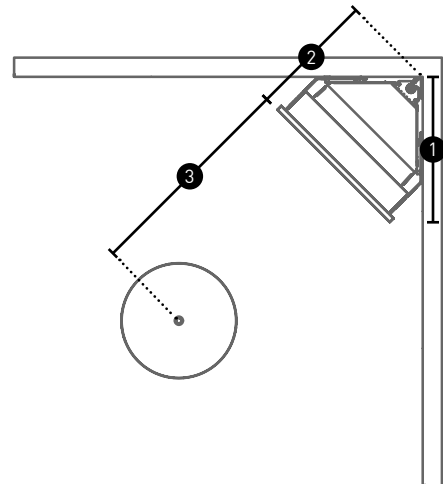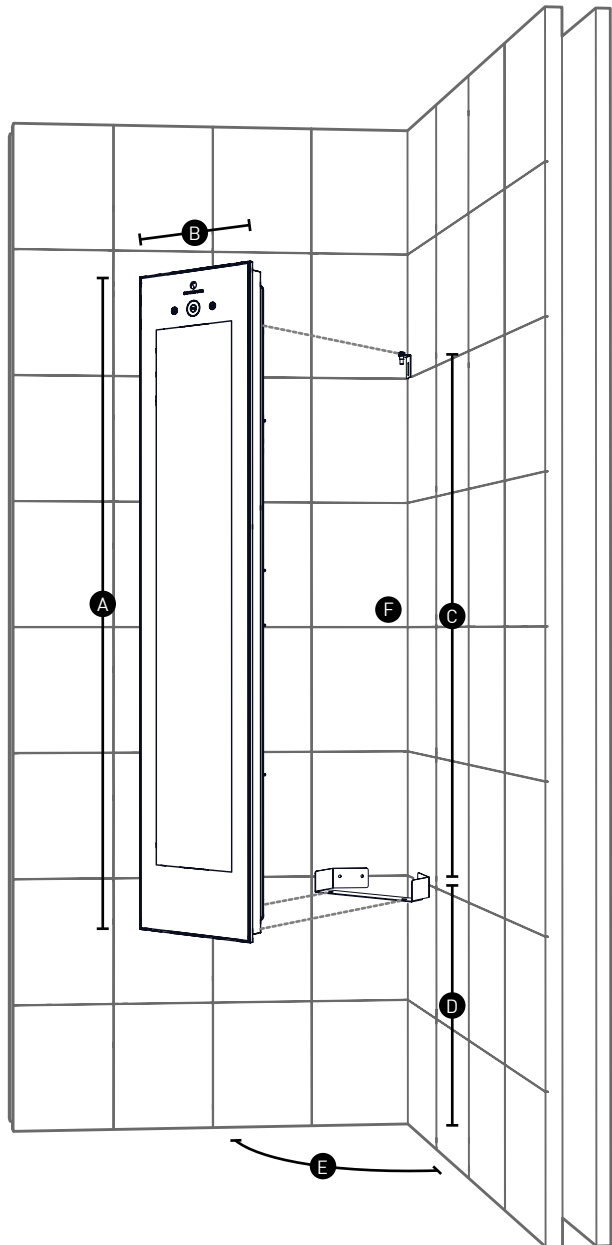

- A** 1450 mm
- B** 300 mm
- C** 1335 mm
- D** 350 mm
- E** 90°
- F** Electrical connection

- 1** 270 mm
- 2** 230 mm
- 3** 450 mm