

sunshower®

health & wellbeing

DELUXE

BUILD-IN | FULL BODY | UV | INFRARED

ARTICLE NO. 80015 / 80016

TECHNICAL SPECIFICATIONS

SESSION TIME INFRARED	8 MINUTES + 4 MINUTES COOLING
SESSION TIME UV	10 MINUTES + 4 MINUTES COOLING
DIMENSIONS (H*W*D)	1870 * 320 * 165 MM (RECESSED)
NET WEIGHT	35 KG
IP CODE	IPX5
VOLT/FREQUENCY	230 V- / 50Hz
POWER	2600 W
INSULATION CLASS	I
POWER UV LAMPS	400 W
LAMP TYPE	4X UV PHILIPS HPA CLEO SWIFT 250-500 5X IR USHIO 500 W
UV CLASS	TYPE 3
TEMPERATURE RANGE	10°C - 40°C
HUMIDITY RANGE	20% - 100%



INSTALLATION

- Recessed in cabin wall
 - Prepare electrics in the wall
 - Prepare ventilation in the wall
- Suitable for installation in shower cabin
- Suitable for installation in steam cabin

ELECTRICS


- A separate fuse group is required
- YMKV cable 3x2,5mm² + PE cable 6mm²
- Connect to RCD 30mA

VENTILATION

- Round channel diameter of 100mm or rectangular channel of 110x54mm
- Air intake lower left or right, air exhaust upper middle
- Ventilation to other dry area (minimally 12 m³), outdoor or to the bathroom (in case of an enclosed shower cabin)
- The Sunshower should not be connected to an external ventilator/mechanical ventilation system

sunshower®

health & wellbeing

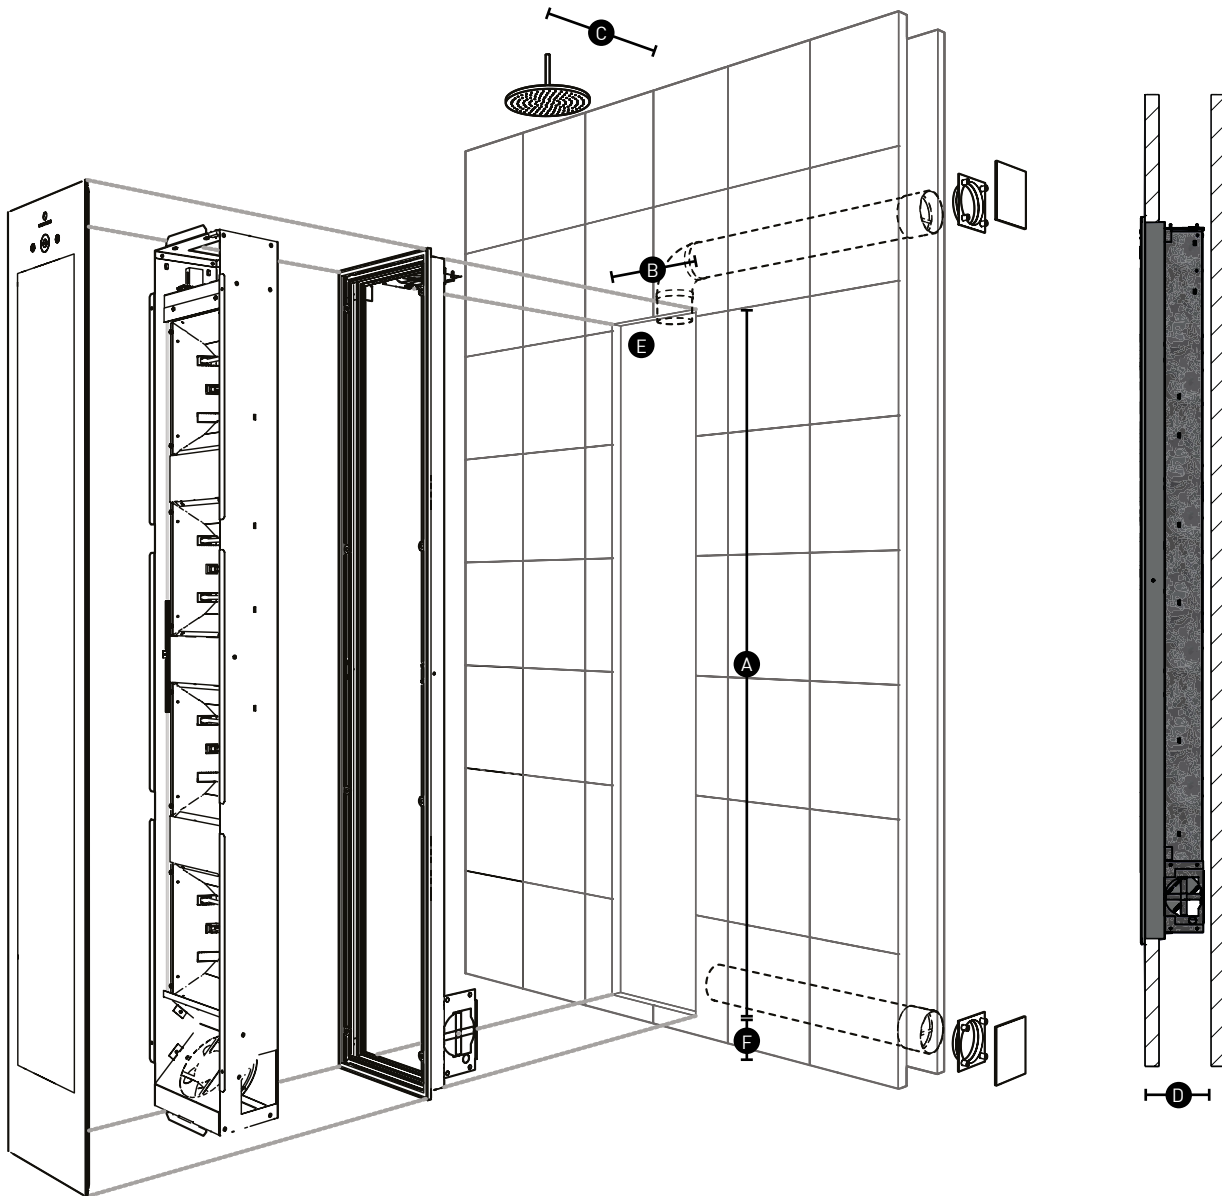

- A** 1850 mm
- B** 300 mm
- C** 450 mm
- D** 165 mm
- E** Electrical connection
- F** 50 mm