

sunshower®

health & wellbeing

DUO

BUILT-IN | 2X COMPACT | INFRARED

ARTICLE NO. 80075

TECHNICAL SPECIFICATIONS

SESSION TIME	10 MINUTES + 5 MINUTES COOLING
DIMENSIONS (H*W*D)	619 * 199 * 100 MM (RECESSED) 320 * 199 * 100 MM (RECESSED)
NET WEIGHT	2.5 KG 1.5 KG
IP CODE	IPX5
VOLT/FREQUENCY	230 V~ / 50 Hz
POWER	1000 W 500 W
INSULATION CLASS	I
LAMP TYPE	IR USHIO 1000 W IR USHIO 500 W
TEMPERATURE RANGE	10°C - 40°C
HUMIDITY RANGE	20% - 100%



INSTALLATION

- Recessed in cabin wall
 - Prepare electrics in the wall
 - Prepare ventilation in the wall
- Suitable for installation in shower cabin
- Suitable for installation in steam cabin or with shower seat

ELECTRICS


- A separate fuse group is required
- YMKV cable 3x2,5mm² + PE cable 6mm²
- Connect to RCD 30mA

VENTILATION

- Round channel diameter of 100mm or rectangular channel of 110x54mm
- Air intake bottom center, air exhaust top center
- Ventilation to other dry area (minimally 12 m³), outdoor or to the bathroom (in case of an enclosed shower cabin)
- The Sunshower should not be connected to an external ventilator/mechanical ventilation system

sunshower®

health & wellbeing

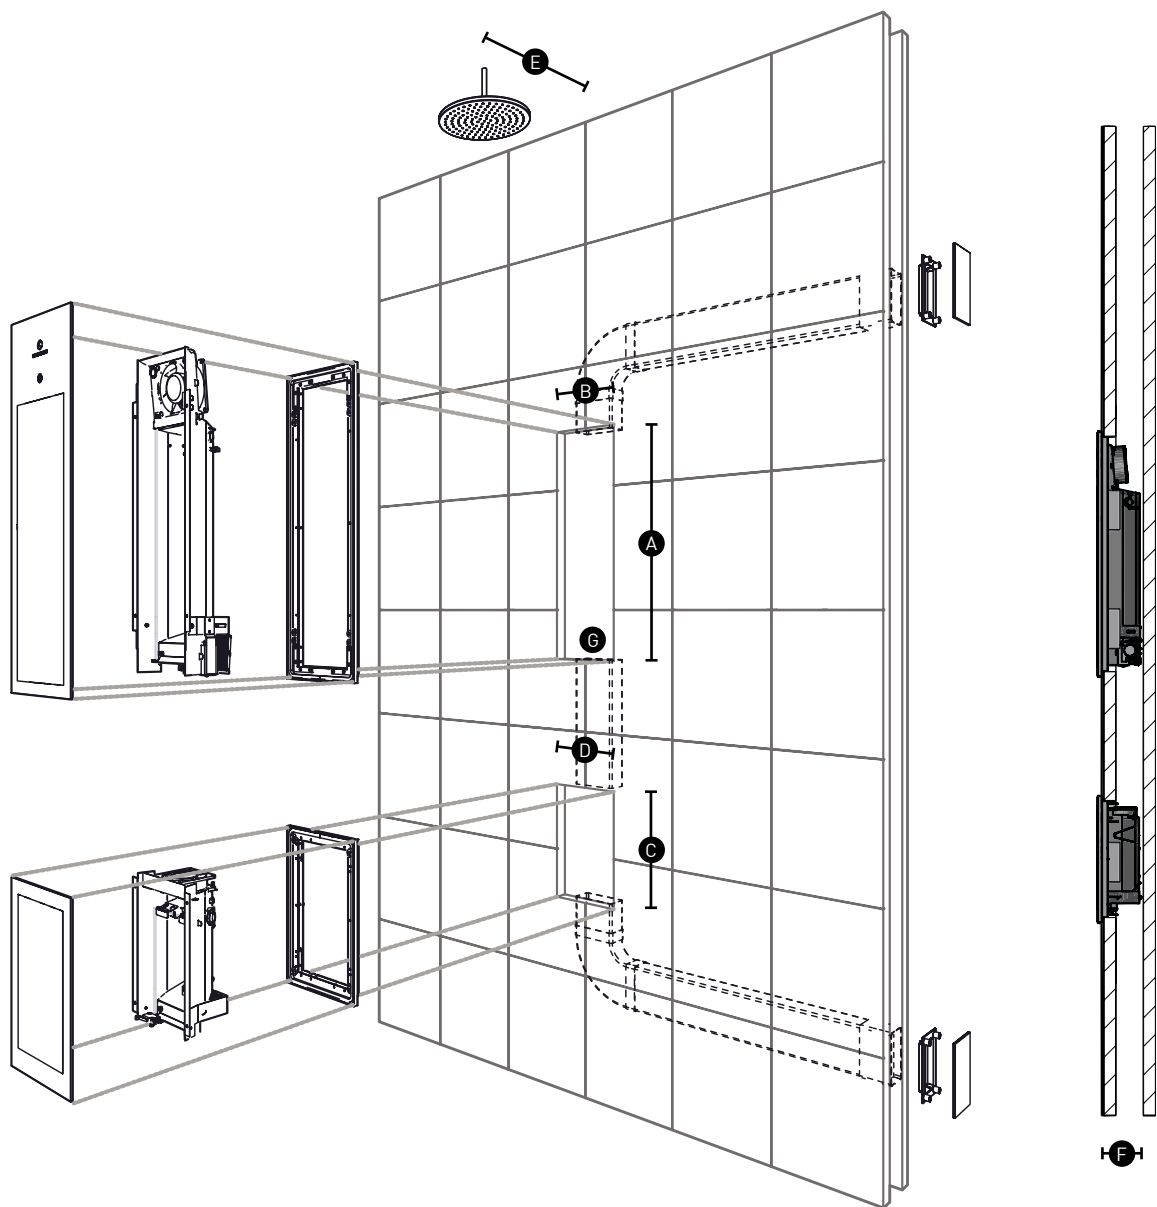

- A 596 mm
- B 176 mm
- C 296 mm
- D 176 mm
- E 450 mm
- F 100 mm
- G Electrical connection