

# sunshower®

health & wellbeing

## PURE

BUILD-IN | HALF BODY | INFRARED

ARTICLE NO. 80073 / 80063

### TECHNICAL SPECIFICATIONS

|                    |                                |
|--------------------|--------------------------------|
| SESSION TIME       | 10 MINUTES + 5 MINUTES COOLING |
| DIMENSIONS (H*W*D) | 619 * 199 * 100 MM (RECESSED)  |
| NET WEIGHT         | 2.5 KG                         |
| IP CODE            | IPX5                           |
| VOLT/FREQUENTIE    | 230 V~ / 50 Hz                 |
| POWER              | 1010 W                         |
| INSULATION CLASS   | I                              |
| LAMP TYPE          | IR USHIO 1000 W                |
| TEMPERATURE RANGE  | 10°C - 40°C                    |
| HUMIDITY RANGE     | 20% - 100%                     |



### INSTALLATION

- Recessed in cabin wall
  - Prepare electrics in the wall
  - Prepare ventilation in the wall
- Suitable for installation in shower cabin
- Suitable for installation in steam cabin
- Suitable for installation with shower seat

### ELECTRICS


- Can be added to an existing fuse group
- YMKV cable 3x2,5mm<sup>2</sup> + PE cable 6mm<sup>2</sup>
- Connect to RCD 30mA

### VENTILATION

- Round channel diameter of 100mm or rectangular channel of 110x54mm
- Air intake bottom center, air exhaust top center
- Ventilation to other dry area (minimally 12 m<sup>3</sup>), outdoor or to the bathroom (in case of an enclosed shower cabin)
- The Sunshower should not be connected to an external ventilator/mechanical ventilation system

# sunshower®

health & wellbeing

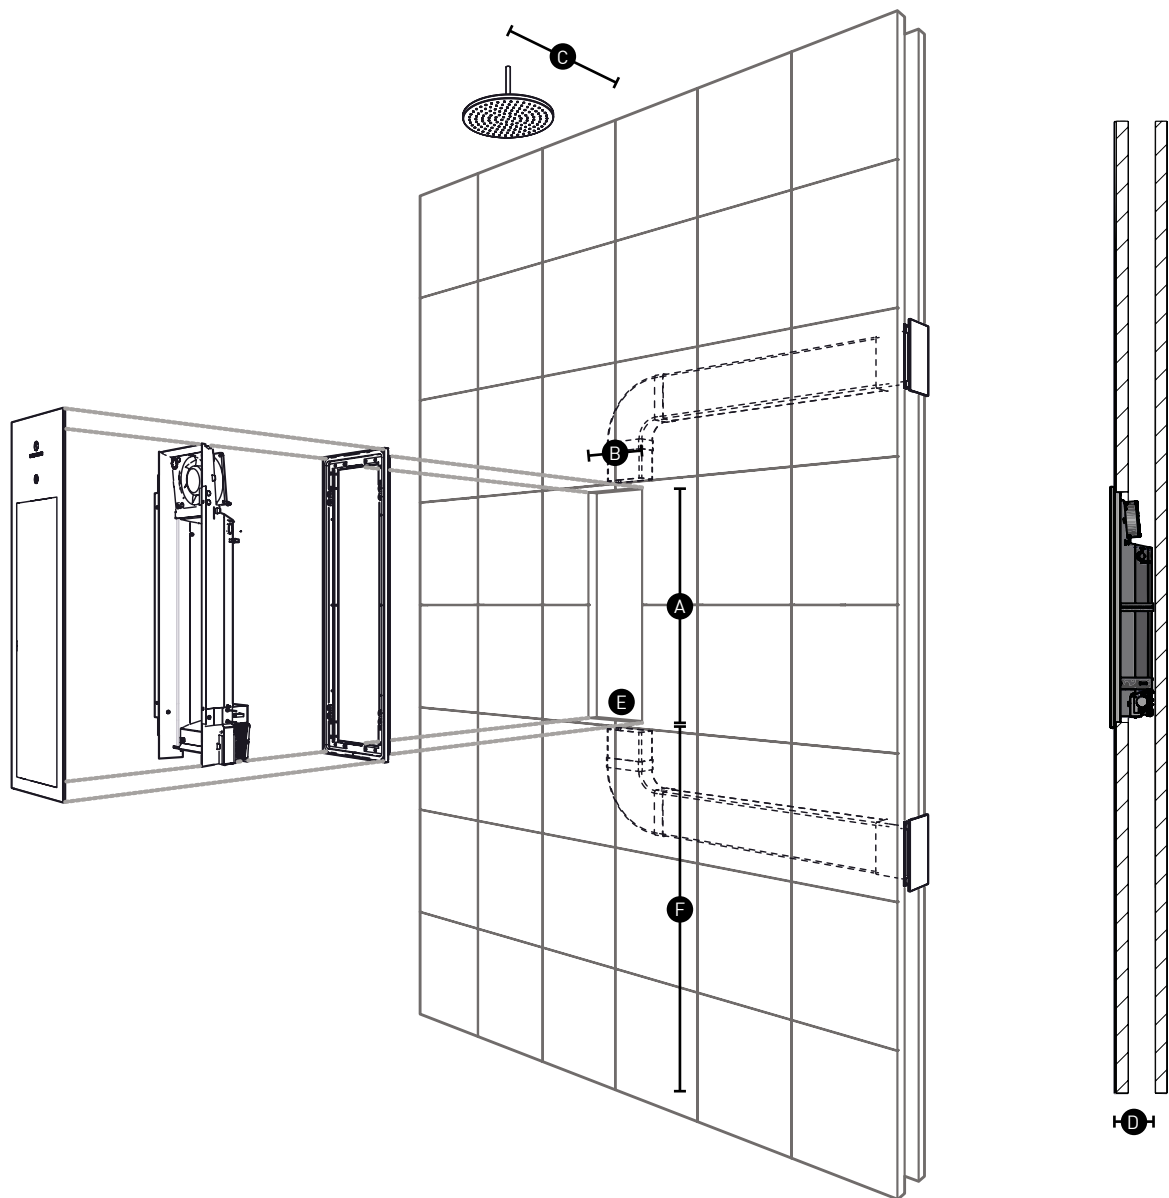

- A** 596 mm
- B** 176 mm
- C** 450 mm
- D** 100 mm
- E** Electrical connection
- F** 910 mm